

13

The app will find your location and auto fill your details. Please confirm this is all correct.

Location	
Site Name	GAPOSA USA
Address	3920 Providence Rd
Town	Newtown Square
County	Delaware County
State	Pennsylvania
Zip	19073
Country	US
<a href="#">Add Location</a>	

14

Once you have created your account, please sign in using the credentials you just created.

Sign In	
Sign In with your RollApp Account If you don't have an account click add new account	
Email	gaposa@gmail.com
Password	password
<a href="#">Forgot Password</a>	
<a href="#">Log In</a>	
<a href="#">Add New Account</a>	





15

Scan the QR code or enter the serial number. Click **Register Now** -The app will ask to use the camera to take a picture of the QR code

Register Hub	
Scan the QR Code on the base of your LinkIT to register your device.	
	
Serial Number:	AC67B25445C0
Device Name:	Gaposa USA
<a href="#">Register Now</a>	

16

The app is now setup and you can begin to add rooms and shades.

Favorite Rooms	
No Favorite Added	
   	

Before installing Roll.App, read this installation and the safety instruction carefully. The installation and implementation of this product must be carried out by a motorization and home automation professional, in accordance with the GAPOSA instructions and the regulations applicable in the country of commissioning.

The installer must inform his customers of the conditions of use and maintenance of the product. Any use outside the scope of application defined by GAPOSA is prohibited. As with any breach of the instructions in this manual, it would result in the exclusion of liability and warranty claims under GAPOSA. Before installation, check the compatibility of this product with the associated equipment and accessories. Please read these warnings carefully, they supplement the product manuals before using Roll.App home automation solutions. Please also notify all other Roll.App users of the following. Gaposa cannot be held responsible for any harmful consequences that could occur if the user has not taken into account the instructions given in the product manual, in the safety instructions and warnings below. For information, advice and complaints regarding the use of Roll.App home automation solutions, please contact a Gaposa representative ([www.gaposa.com](http://www.gaposa.com)) or refer to the applicable sales literature.

GAPOSA Srl has developed Roll.App to control Gaposa radio products, including motors for shutters and blinds as well as receivers and sensors of the same brand. Gaposa also offers the possibility of controlling other radio products such as Z-Wave and ZigBee, but cannot be held responsible for the implementation of these products in the Roll.App network. The control of garage doors and gates is not recommended and therefore excluded from Roll.App.

When configuring or using a home automation system, users must take into account the environment of the home as well as each specific equipment or any particular situation relative to each of the residents. Users must take additional precautions when remotely configuring connected equipment or when its operation is likely to affect children, persons with reduced mobility or animals. Users must use the Gaposa home automation services in their area of use (see applicable sales documentation) and set up the operating scenarios correctly so that they do not create any risk for the residents of the house.

The functioning of Gaposa home automation solutions must be tested periodically by the main user. The latter must regularly check the various connections and operating scenarios. Gaposa recommends that the connected equipment and its settings be subject to preventive maintenance and regularly checked by a home automation professional, at the initiative of the Primary User.

### Technical details

Hub Input Voltage	5V
Hub Input Power	0.3 A Max.
Frequency (MHz)	434.15 MHz
Connection	Wi-Fi
Wi-Fi network	2,4 GHz only
Range	30 mt / 98 feet
Protection Rate	IP20
Operation Temperature	0°C to 60°C / 32°F to 140°F
IOT Integration	Amazon Alexa, Google Assistant



### GAPOSA srl

via Ete, 90 - 63900 Fermo - Italy  
Tel. +39.0734.220701 - Fax +39.0734.226389  
[www.gaposa.com](http://www.gaposa.com) - [info@gaposa.com](mailto:info@gaposa.com)

**GAPOSA**  
**Roll**  
**app**




CONTROL UP TO 32  
DIFFERENT GAPOSA  
MOTORIZED PRODUCTS  
FROM THE APP FROM  
ANYWHERE YOU ARE.



**QUICK GUIDE**


1

Plug the hub into an outlet within range of your Wi-Fi network and Gaposal powered shades.

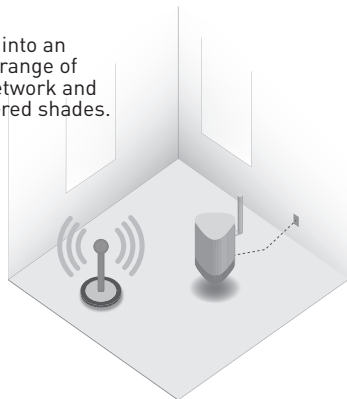


2

Open your Wi-Fi settings and connect to the network **GAPOSA-xxxx** (ex: GAPOSA-c045)

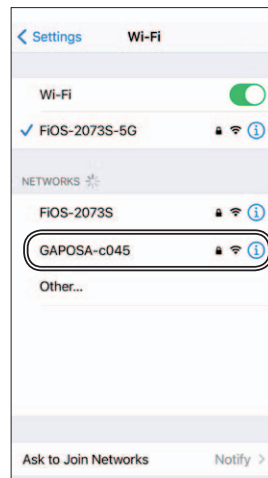


5

Click **Configure new Wifi**

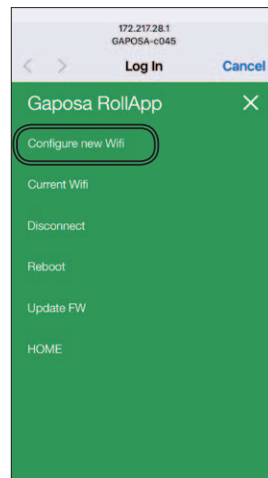

6

A list of visible WiFi networks appears. Please select your home WiFi network.

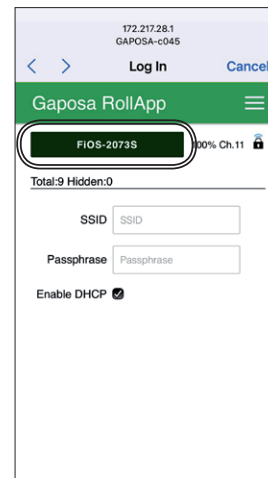


9

Download the app from the app store. Search **RollApp**




10

Open the app and create an account by clicking **Add New Account**  
The app will ask for location permissions. Please allow location use for sunset / sunrise control.

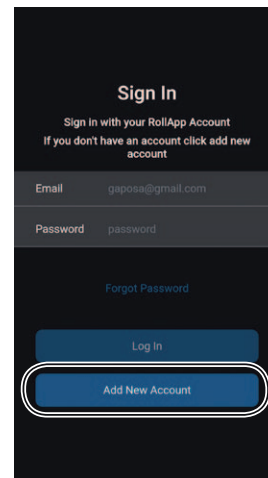


3

Enter password to connect (Case sensitive): **Gaposalnit**

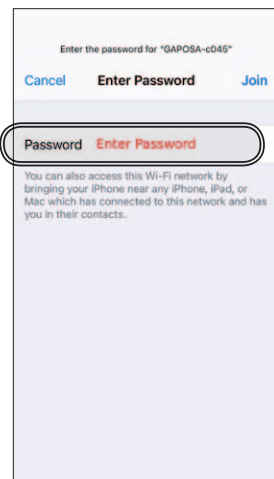


4

You will be taken to the network sign-in page, if not, you must sign into the network from settings. Click the **menu button** at the top right if on a mobile phone.

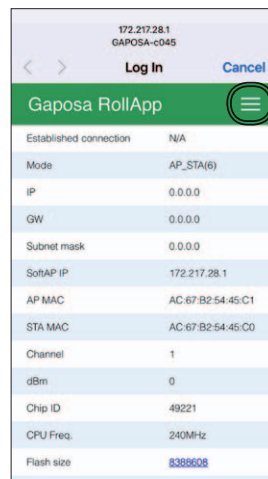


7

Enter your WiFi network password and click **Apply**

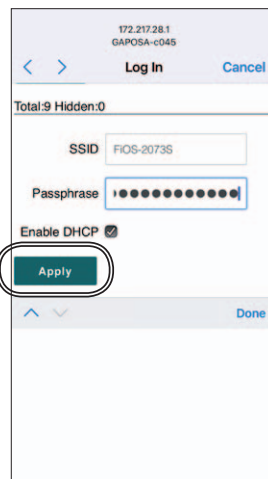


8

Exit out of the hub sign in page and reconnect to your home WiFi if it doesn't connect automatically.

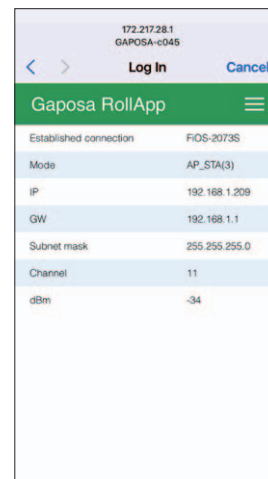


11

Fill out the form with your desired account information.

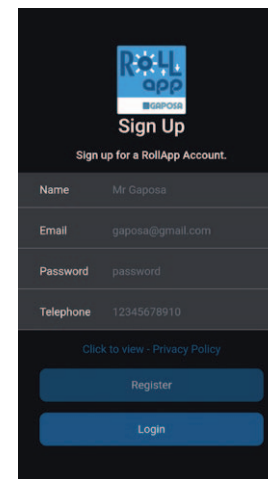

12

Read the privacy policy and accept to continue.

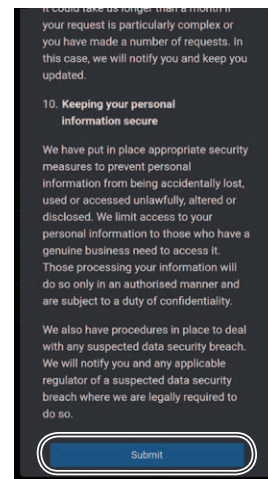

It could take us longer than a moment if your request is particularly complex or you have made a number of requests. In this case, we will notify you and keep you updated.

#### 10. Keeping your personal information secure

We have put in place appropriate security measures to prevent personal information from being accidentally lost, used or accessed unlawfully, altered or disclosed. We limit access to your personal information to those who have a genuine business need to access it. Those processing your information will do so only in an authorised manner and are subject to a duty of confidentiality.

We also have procedures in place to deal with any suspected data security breach. We will notify you and any applicable regulator of a suspected data security breach where we are legally required to do so.